

GG940C

TELESCOPIC LOADER

The machine is equipped with a Kubota Euro 5 engine that meets the latest exhaust emission standards. The four-cylinder unit, water-cooled, generates 18.2 kW of power at 2600 rpm, providing optimal dynamics and low fuel consumption. With a rated load capacity of 850 kg and a weight of 1860 kg, it guarantees stability and safety even during intensive work.

The hydraulic system operates under a pressure of 190 bar, resulting in high operational efficiency. The oil flow in the working system is 67 liters per minute, while the drive pump provides a flow of 78 liters per minute, ensuring smooth and precise machine operation. The telescopic loader achieves a speed of 12 km/h, and with a steering angle of 45 degrees. The maximum lifting height is 3 meters, and the bucket tilt angle is 30 degrees, allowing for easy maneuvering of the load.




■ Specification

Rated Load Capacity	850 kg
Engine	Kubota Euro 5
Number of Cylinders	4
RPM	2600
Hydraulic Oil Flow - Working	67 L/min
Fuel Tank Capacity	23 L
Voltage	12 V
Weight	1860 kg
Cooling System	Water cooling
Rated Power	18.2 KW
Pressure	190 bar
Hydraulic Oil Flow – Drive Pump	78 L/min
Battery Capacity	60 Ah

Overall Height with Fully Raised Boom and Open Bucket 3430 mm

Distance from Center of Rear Axle to Rear of Machine 850 mm

Wheelbase (from Front to Rear Axle) 1350 mm

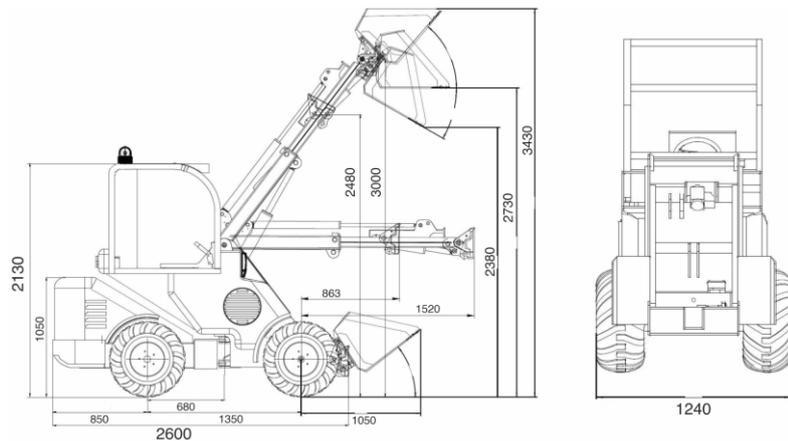

■ Working Range

Driving Speed	12 km/h
Standard Tire Size	26X12-12
Maximum Lifting Height	3 m (3000mm)
Maximum Reach (Boom Retracted)	2480 mm
Turning Angle	45 °
Tire Pressure	2.8 Bar
Maximum Bucket Tilt Angle	30 °
Machine Ground Clearance	1050 mm

■ Main Dimensions

Overall Length	2600 mm
Overall Height	2130 mm
Distance from Front Wheels to Bucket (with Fully Extended Boom)	1520 mm
Distance from Center of Rear Axle to Front of Machine (without Extended Boom)	680 mm
Overall Width	1240 mm

