



GG300S

THREE WHEEL LOADER

The compact three-wheel mini loader GG300S is an exceptionally agile and lightweight machine with an operating weight of 500 kg, designed for work in confined spaces. Thanks to its 0–360° rotation and travel speed of up to 15 km/h, it provides excellent manoeuvrability, making it ideal for gardening, municipal, construction, and warehouse applications.

The GG300S is powered by a two-cylinder RATO R740D engine with an output of 16,8 kW / 23 HP, compliant with EURO Stage V emission standards. The air-cooled unit ensures stable performance, smooth operation, and resistance to overheating during demanding tasks. The loader offers a 350 kg lifting capacity and a maximum tipping load of 400 kg, allowing efficient handling of soil, aggregates, waste, and bulk materials. Standard equipment includes a quick-coupler and a 1000 mm bucket, further enhancing the machine's operational versatility.

Parameter


Engine	RATO R740D
Fuel Type	Petrol
Number of Cylinders	2
Emission Standard	EURO Stage V
Maximum Engine Power	16,8 kW / 23 HP at 3600 rpm
Maximum Torque	47 Nm at 2500 rpm
Operating Weight	500 kg
Maximum Tipping Load	400 kg
Lifting Capacity	350 kg
Fuel Tank Capacity	10 l
Hydraulic Oil Tank Capacity	10 l
Hydraulic Flow	29 l/min
Cooling System	Air-cooled
Standard Equipment	Bucket + Quick Coupler

Scope of work

Travel Speed	15 km/h
Steering Angle	0–360°
Standard Tires	18×9,50-8
Turning Radius (Inner/Outer)	0/993 mm

Dimensions

Length	1854 mm
Width	993 mm
Height	1304 mm
Bucket Width	1000 mm

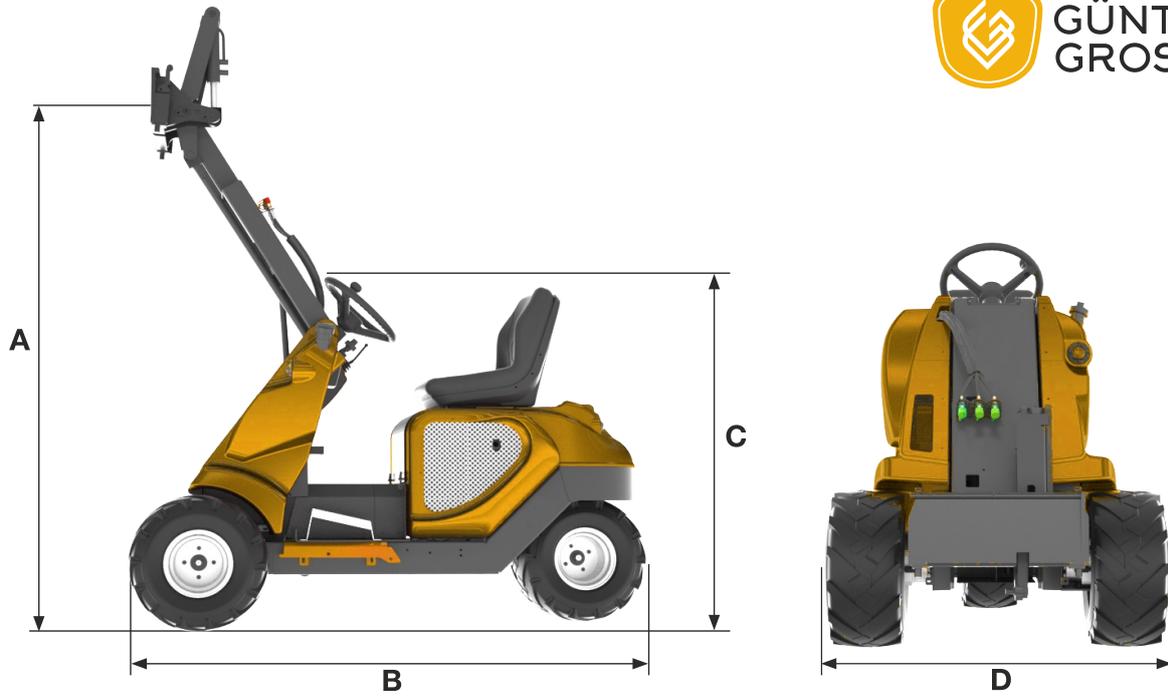

■ Diagram GG300S

A	Lift Height	1880 mm
B	Length	1854 mm
C	Height	1304 mm
D	Width	993 mm
	Tires	18x9.50-8

